

FLX-26-10MM-2835-24

LED flexible strip



FEATURES


- Various angles 120 °
- With self-adhesive tape on the back
- Made up of high quality LEDs
- Work voltage DC24V
- Cut every 125.41mm, 16 led per cut

APPLICATIONS

- Car decoration
- Architectural decorative lighting
- Archway, ceiling, bridge edge lighting
- Auditorium walkway lighting
- Signage letters backlighting
- Channel letter lighting

MECHANICAL SPECIFICATIONS


–Dimensions version 192DEL/m

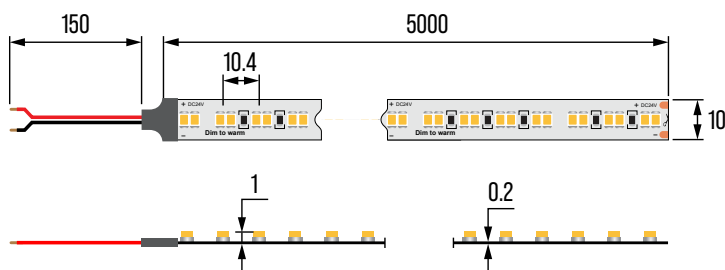

Unit: mm

Cut: 125.41mm, 16 led per cut

–Connection diagram

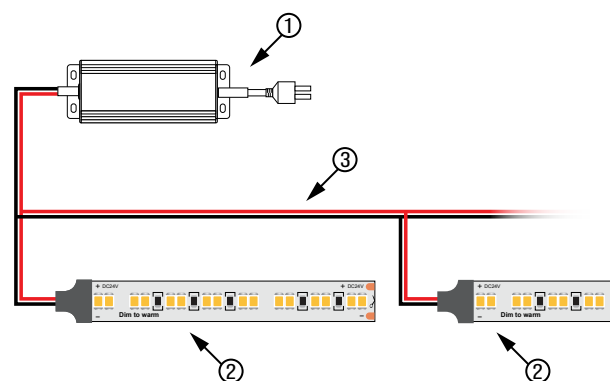

- ① Power supply (driver)
- ② LED strips
- ③ Wires

TECHNICAL SPECIFICATIONS

LED DIMENSIONS




SMD2835
(2.8mm x 3.5mm)

LED QTY



192DEL/m

INCREMENT



Cut every
125.41mm

VOLTAGE



24 volt

POWER



26W/m

PCB WIDTH



10mm

COLOR



Dim to warm
1800-3000K, 2000-2300lm/m

PROTECTION TYPE



IP20



IP67

NOTICE

Before application, please make sure the power supply is in accordance to the strips.

DISCLAIMER

Due to our continued efforts to improve our documents and products, the specifications found on this document are subject to change without notice.