
# 

Important: Read All Instructions Prior to Installation Function introduction

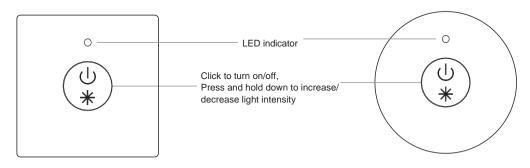

square

Front side

# Product Data

Output	RF signal
Operation Frequency	868/915/434MHz
Power Supply	3V(CR2025 battery)
Operating temperature	0-40°C
Relative humidity	8% to 80%
Dimensions	32x32x9.8mm

- Control 1 zone
- Single color controllerMemory Function
- Compatible with all universal series RF receivers
- 1 receiver can be paired by max 8 different remote controls.
- Waterproof grade: IP20

## Safety & Warnings

- This device contains a button lithium battery that shall be stored and disposed properly.
- DO NOT expose the device to moisture.

### Operation

circular

#### 1. Pair with RF receivers:

Click "Learning Key"  $\rightarrow$  Click \* button on RF receiver  $\rightarrow$  on RF remote  $\rightarrow$  RF receiver will flicker once  $\rightarrow$  remote successfully.

#### 2. How to delete the pairing:

Press and hold down "Learning Key" on the receiver for over 3 seconds until connected LED lights flicker twice, which means the pairing is deleted successfully.

