


SERIES ACUTUS

Trimless recessed aluminum profile

This series of narrow U shape profiles is designed to be recessed and then plastered thus presenting a perfect trimless finish. It will blend with your walls and ceiling featuring a contemporary and stylish look. It offers several power, lenses and assembly options allowing you to let your creativity run free. Promoting better heat dissipation despite being embedded, this series will offer you uncompromising lighting for many years to come.



Description	mm	Inch
A - Width flange	53.10	2.0906
B - Width interior	10.50	0.4134
C - Width exterior	13.10	0.5157
D - Height	14.00	0.5512
X - Measure	10.00	0.3937



FEATURES

Recessed
 Trimless
 Can be cut to your needs
 Allows continuous joint mounting
 Direct lighting
 Wide choice of lens
 Wide choice of colors and finishes
 Clear Anodized Aluminum 6063T5

MOUNTING



PROJECTION

Direct




APPLICATION

Regular (all purpose)

POWER

Type	Lumen Meter	Feet	Watt Meter	Feet
Unique white	420	128	4.8	1.5
Unique white	500	152	4.8	1.5
Unique white	840	256	9.6	2.9
Unique white	1000	305	9.6	2.9
Unique white	700	213	12.0	3.7
Unique white	1100	335	12.0	3.7
Unique white	1400	427	14.0	4.3
Unique white	1200	366	14.4	4.4
Variable white	750	229	9.6	2.9
RGB			8.5	2.6
RGB			14.4	4.4

COLOR TEMPERATURE

Kelvin	Type
 2200K	 RGB
 2400K	
 2700K	 Variable white 2500K - 6000K
 3000K	
 3500K	
 4000K	
 5000K	
 5200K	
 6000K	
 6500K	


GRADATION

Type
Not dimmable
Dimmable Triac
Dimmable 0-10 Volt

DIFFUSER

Type	Light diffuse	Angle
Opalin	78 %	120 °

SHAPE

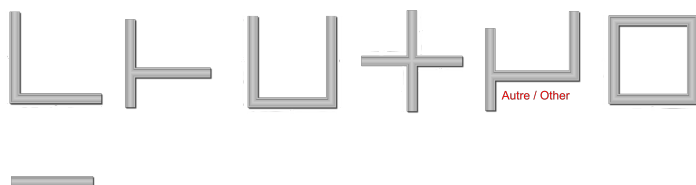

LUMINAIRE COLOR





Sale sheet

31-08-2021 10:04:54

DISCLAIMER

Due to our continued efforts to improve our documents and products, the specifications found on this document are subject to change without notice.