


ALU-085

Aluminum profile for recessed mounting

Modernize your decor and create unique atmospheres by installing this recessed serie. Use it for mounting your fixtures on drywall or floors. Imagine an entire room transparently lit from an even light on the ceiling, wall or under your feet below. The extended width and depth of this profile also allows for perfect diffusion when using a strip light.

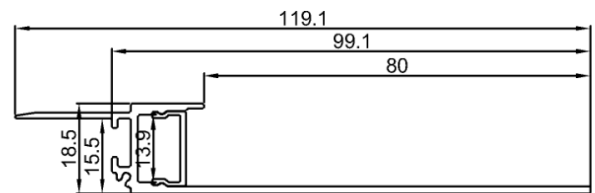


Unit: mm



FEATURES

- Indirect lighting
- Can be cut according to your needs
- Allows continuous joint mounting
- Wide choice of colors
- Clear Anodized Aluminum 6063T5
- Recessed mounting

MOUNTING



PROJECTION






APPLICATION

Regular (all purpose)

POWER

Type	Lumen Meter	Feet	Watt Meter	Feet
Unique white	420	128	4.8	1.5
Unique white	500	152	4.8	1.5
Unique white	840	256	9.6	2.9
Unique white	1000	305	9.6	2.9
Unique white	700	213	12.0	3.7
Unique white	1100	335	12.0	3.7
Unique white	1400	427	14.0	4.3
Unique white	1200	366	14.4	4.4
Unique white	1700	518	18.0	5.5
Unique white	1700	518	19.2	5.9
Unique white	1800	549	19.2	5.9
Unique white	3400	1036	22.0	6.7
Unique white	4000	1219	22.0	6.7
Variable white	750	229	9.6	2.9
Variable white	1500	457	19.2	5.9
Variable white	1680	512	19.2	5.9
Variable white	1500	457	23.0	7.0
Variable white	2000	610	23.0	7.0
Dim to warm	1800	549	23.0	7.0
Dim to warm	2300	701	26.0	7.9
RGB			8.5	2.6
RGB			14.4	4.4
RGB			17.0	5.2
RGB			20.0	6.1
RGB			20.0	6.1
RGBA			19.2	5.9
RGBA			19.2	5.9
RGBA			23.0	7.0
RGBW			19.2	5.9
RGBW			23.0	7.0

COLOR TEMPERATURE

Kelvin	Type
2200K	 RGB
2400K	
2700K	 RGB+ W
3000K	
3500K	 RGB+ A
4000K	
5000K	 Dim to warm 1800K - 3000K
5200K	
6000K	 Variable white 2500K - 6000K 2700K - 6000K
6500K	


GRADATION

Type
Non dimmable
Dimmable Triac
Dimmable 0-10 Volt


DIFFUSER

Type	Light diffuse	Angle
Frosted	86 %	120 °

SHAPE

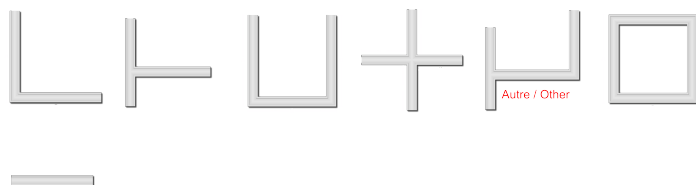


LUMINAIRE COLOR




ACCESSORIES




Endcap without hole (metal)




180° Connector (metal)



Endcap with hole (metal)




90° Connector (metal)

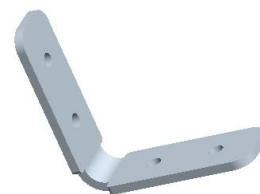


90° Vertical connector (metal)

INSTALLATION


(1) Stick the LED strip




(2) Press the diffused cover




(3) Fix the endcaps

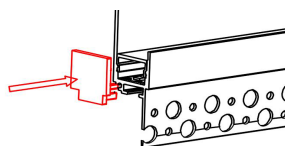


(4) Mounting the fixture



(5) Plaster on the fixture & drywall

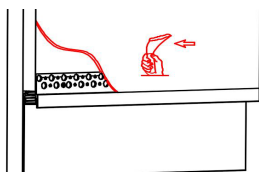

(6) Painting on the fixture & drywall

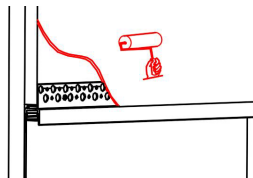

(7) Installation completed

