
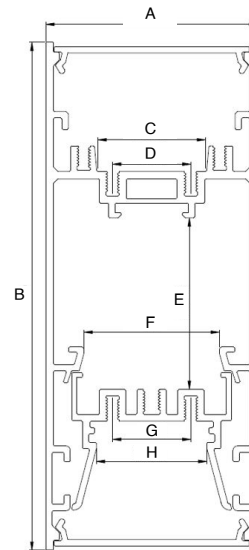


SERIES GEMINUS

Aluminum profile for surface (wallwasher) or suspended (direct/indirect) mounting for uplighting and downlighting

Modernize your decor and create unique atmospheres by installing this series on the wall or hanging it. It is distinguished by its sleek look and the possibility of having both direct and indirect lighting. The multiple color, finish, power, lens and assembly options make it a versatile series. Promoting better heat dissipation, this series will give you its full potential for many years to come.

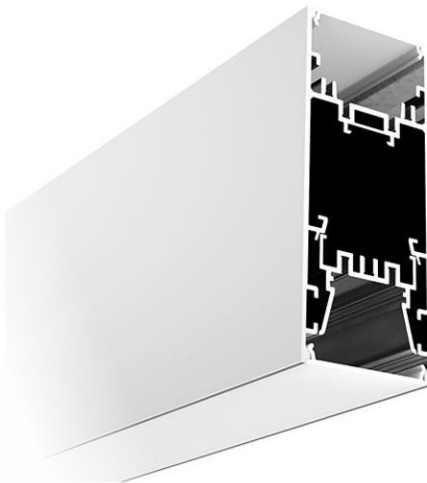


	mm	Inch
A -	50	1'' 15/16
B -	120	4'' 3/4
C -	25.4	1''
D -	18.5	3/4
E -	40.5	1'' 5/8
F -	32	1'' 1/4
G -	18.5	3/4
H -	26.1	1''




FEATURES

- Direct and indirect lighting
- Wall wash
- Can be cut according to your needs
- Allows continuous jointed mounting
- Wide choice of lenses
- Wide choice of colors and finishes
- Clear Anodized Aluminum 6063T5

MOUNTING



PROJECTION




APPLICATION

- Wall-washer
- Regular (all purpose)

POWER

Type	Lumen Meter	Feet	Watt Meter	Feet
Unique white	420	128	4.8	1.5
Unique white	500	152	4.8	1.5
Unique white	840	256	9.6	2.9
Unique white	1000	305	9.6	2.9
Unique white	700	213	12.0	3.7
Unique white	1100	335	12.0	3.7
Unique white	1400	427	14.0	4.3
Unique white	1200	366	14.4	4.4
Unique white	1700	518	18.0	5.5
Unique white	1700	518	19.2	5.9
Unique white	1800	549	19.2	5.9
Unique white	3400	1036	22.0	6.7
Unique white	4000	1219	22.0	6.7
Variable white	750	229	9.6	2.9
Variable white	1500	457	19.2	5.9
Variable white	1680	512	19.2	5.9
Variable white	1500	457	23.0	7.0
Variable white	2000	610	23.0	7.0
Dim to warm	1800	549	23.0	7.0
Dim to warm	2300	701	26.0	7.9
RGB			8.5	2.6
RGB			14.4	4.4
RGB			17.0	5.2
RGB			20.0	6.1
RGB			20.0	6.1
RGBA			19.2	5.9
RGBA			19.2	5.9
RGBA			23.0	7.0
RGBW			19.2	5.9
RGBW			23.0	7.0

COLOR TEMPERATURE

Kelvin	Type
2200K	 RGB
2400K	
2700K	 RGB+ W
3000K	
3500K	 RGB+ W
4000K	
5000K	 Dim to warm 1800K - 3000K
5200K	
6000K	 Variable white 2500K - 6000K 2700K - 6000K
6500K	


GRADATION

Type
Non dimmable
Dimmable Triac
Dimmable 0-10 Volt

DIFFUSER

Type	Light diffuse	Angle
Frosted	78 %	120 °

SHAPE

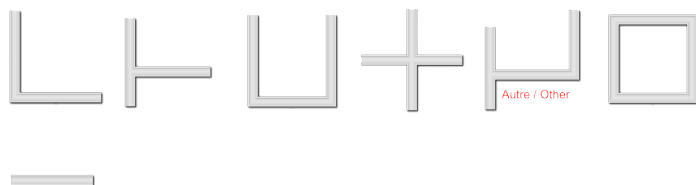

LUMINAIRE COLOR





Sale sheet

04-05-2022 12:21:10

DISCLAIMER

Due to our continued efforts to improve our documents and products, the specifications found on this document are subject to change without notice.