


SERIES INUNDATIO

Thin aluminum profile for surface mounting and direct / indirect lighting (wall washer)

Modernize your decor and create unique atmospheres by installing this series on the wall. It is distinguished by its sleek look, its slim profile and its capability to offer both direct and indirect wall washer lighting. The multiple colors, finishes, powers, lenses and assembly options make it a versatile series. Promoting better heat dissipation, this series will offer you its full potential for many years to come.



Description	mm	Inch
B - Width interior	24.30	0.9567
C - Width exterior	85.00	3.3465
D - Height	42.30	1.6654
X - Measure	32.30	1.2717
Y - Measure	41.80	1.6457



FEATURES


- Thin profile
- Stylish
- Wall wash
- Can be cut according to your needs
- Allows continuous joint mounting
- Direct and/or indirect lighting
- Wide choice of lens
- Wide choice of colors and finishes
- Clear Anodized Aluminum 6063T5

APPLICATION

- Wall-washer
- Regular (all purpose)

MOUNTING

Surface mount



PROJECTION

Direct



Indirect






Direct and indirect



POWER

Type	Lumen Meter	Feet	Watt Meter	Feet
Unique white	420	128	4.8	1.5
Unique white	500	152	4.8	1.5
Unique white	840	256	9.6	2.9
Unique white	1000	305	9.6	2.9
Unique white	700	213	12.0	3.7
Unique white	1100	335	12.0	3.7
Unique white	1400	427	14.0	4.3
Unique white	1200	366	14.4	4.4
Unique white	1700	518	18.0	5.5
Unique white	1700	518	19.2	5.9
Unique white	1800	549	19.2	5.9
Unique white	3400	1036	22.0	6.7
Unique white	4000	1219	22.0	6.7
Unique white	2000	610	28.8	8.8
Unique white	2200	671	28.8	8.8
Unique white	2300	701	28.8	8.8
Unique white	3360	1024	38.4	11.7
Variable white	750	229	9.6	2.9
Variable white	1500	457	19.2	5.9
Variable white	1680	512	19.2	5.9
Variable white	1500	457	23.0	7.0
Variable white	2000	610	23.0	7.0
Variable white	3360	1024	38.4	11.7
Dim to warm	1800	549	23.0	7.0
Dim to warm	2300	701	26.0	7.9
RGB			8.5	2.6
RGB			14.4	4.4
RGB			17.0	5.2
RGB			20.0	6.1
RGB			20.0	6.1
RGB			28.8	8.8
RGBA			19.2	5.9
RGBA			19.2	5.9
RGBA			23.0	7.0
RGBA			30.0	9.1
RGBW			19.2	5.9
RGBW			23.0	7.0
RGBW			30.0	9.1

COLOR TEMPERATURE

Kelvin	Type
1800K	 RGB
2200K	
2400K	 RGB+ W
2700K	
3000K	 RGB+ A
3500K	
4000K	
5000K	Dim to warm 1800K - 3000K
5200K	
6000K	
6500K	Variable white 2500K - 6000K 2700K - 6000K


GRADATION

Type
Not dimmable
Dimmable Triac
Dimmable 0-10 Volt

DIFFUSER

Type	Light diffuse	Angle
Opalin	78 %	120 °
Frost	85 %	120 °

SHAPE

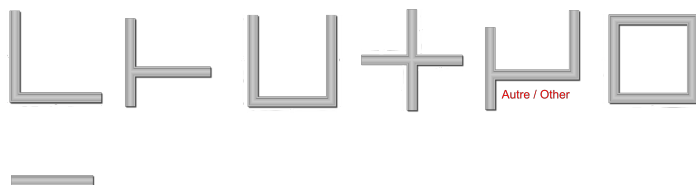

LUMINAIRE COLOR





Sale sheet

31-08-2021 10:03:09

DISCLAIMER

Due to our continued efforts to improve our documents and products, the specifications found on this document are subject to change without notice.