

FLX-19.2-1-10MM-2835-24

LED flexible strip



FEATURES


- Various angles 120 °
- With self-adhesive tape on the back
- Made up of high quality LEDs, CRI ≥95
- Work voltage DC24V
- Cut every 49.21mm

APPLICATIONS

- Car decoration
- Architectural decorative lighting
- Archway, ceiling, bridge edge lighting
- Auditorium walkway lighting
- Signage letters backlighting
- Channel letter lighting


MECHANICAL SPECIFICATIONS

–Dimensions version 120DEL/m

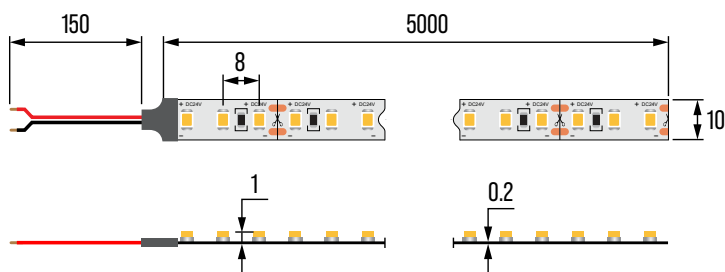

Unit: mm
Cut: 49.21mm

–Connection diagram

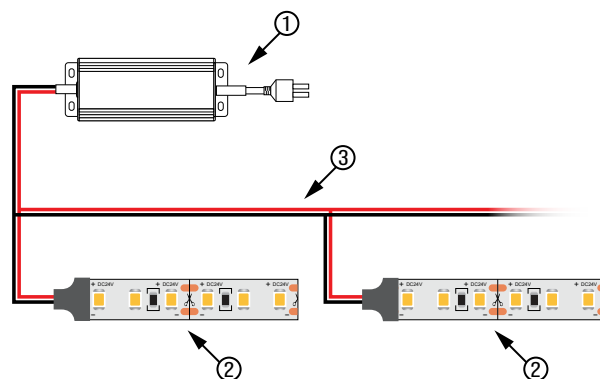

- ① Power supply (driver)
- ② LED strips
- ③ Wires

TECHNICAL SPECIFICATIONS

LED DIMENSIONS




SMD2835
(2.8mm x 3.5mm)

LED QTY



120DEL/m

INCREMENT



Cut every
49.21mm

VOLTAGE



24 volt

POWER



19.2W/m

PCB WIDTH



10mm

COLOR



Warm white:
2700-3000K, 1500-1600lm/m

Nature white:
4000-4500K, 1600-1700lm/m

Pure white:
6000-6500K, 1700-1800lm/m

PROTECTION TYPE



IP20



IP67

NOTICE

Before application, please make sure the power supply is in accordance to the strips.

DISCLAIMER

Due to our continued efforts to improve our documents and products, the specifications found on this document are subject to change without notice.