


FLX-19.2-5050-24-RGBW

LED flexible strip

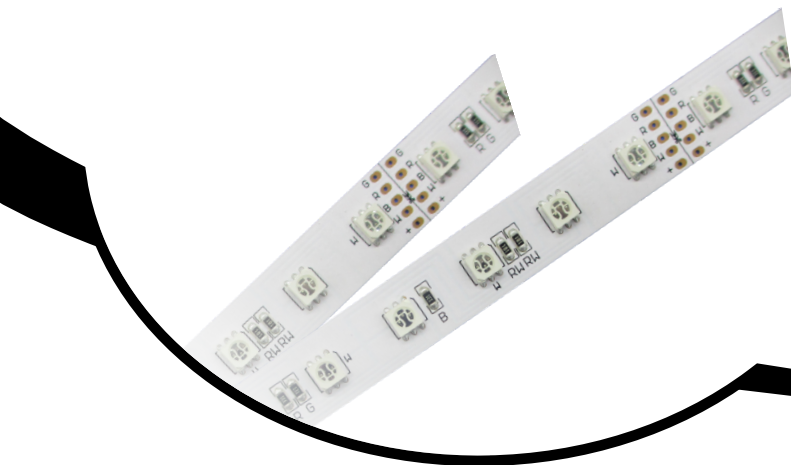

FEATURES


- Various angles 120 °
- With self-adhesive tape on the back
- Made up of high quality LEDs, CRI 80+, 90+
- Work voltage DC24V
- Cut every 100mm

APPLICATIONS

- Car decoration
- Architectural decorative lighting
- Archway, ceiling, bridge edge lighting
- Auditorium walkway lighting
- Signage letters backlighting
- Channel letter lighting


MECHANICAL SPECIFICATIONS

-Dimensions version 60DEL/m

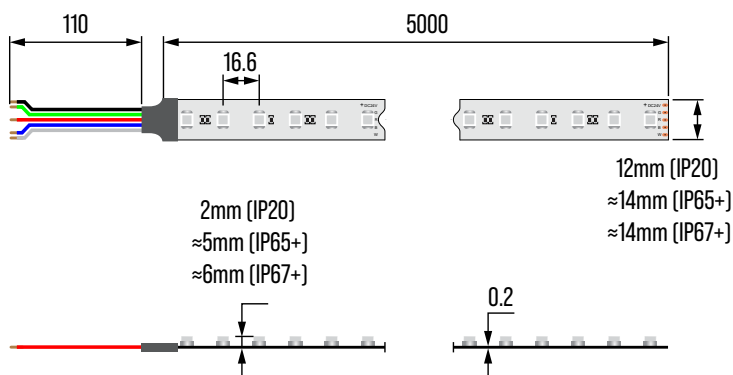

Unit: mm
Cut: 100mm
LED type: 5050 RGBW

-Connection diagram

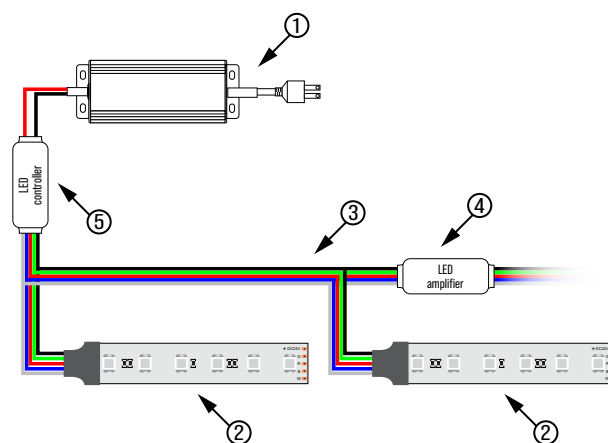

TECHNICAL SPECIFICATIONS

LED DIMENSIONS




SMD5050
(5mm x 5mm)

LED QTY



60DEL/m

INCREMENT



Cut every
100mm

VOLTAGE



24 volt

POWER



19.2W/m

PCB WIDTH



12mm (IP20)
≈14mm (IP65+)
≈14mm (IP67+)

COLOR



RGBW (red, green, blue, white)

R: 620-625nm / 75-78lm/m
G: 515-520nm / 245-252lm/m
B: 465-470nm / 55-60lm/m

White color temperature
1800/3000/4500/6000K

PROTECTION TYPE



IP20



IP67



IP65

NOTICE

Before application, please make sure the power supply is in accordance to the strips.

DISCLAIMER

Due to our continued efforts to improve our documents and products, the specifications found on this document are subject to change without notice.