


FLX-22-12MM-5630-150-24

LED flexible strip

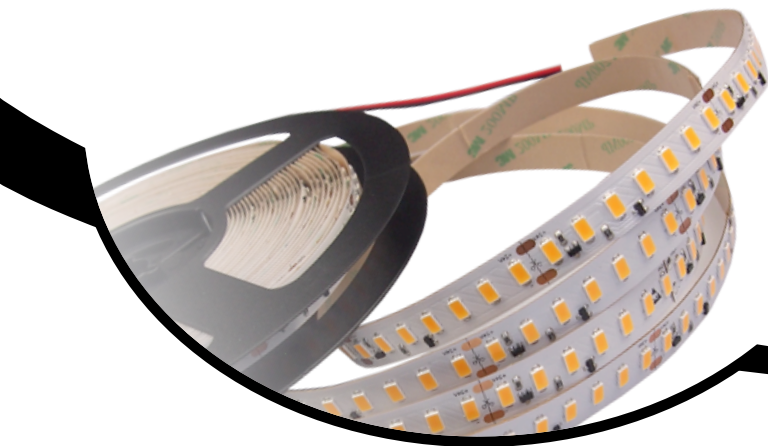

FEATURES


- Various angles 120 °
- With self-adhesive tape on the back
- Made up of high quality LEDs
- Tension de travail DC24V
- Cut every 61.91mm, 7 led per cut

APPLICATIONS

- Car decoration
- Architectural decorative lighting
- Archway, ceiling, bridge edge lighting
- Auditorium walkway lighting
- Signage letters backlighting
- Channel letter lighting

MECHANICAL SPECIFICATIONS


-Dimensions version 128DEL/m

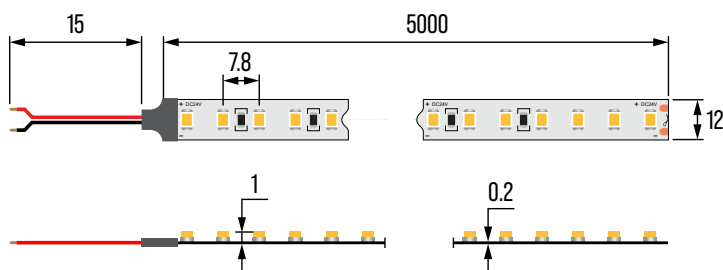

Unit: mm

Cut: 61.91mm, 7 led per cut

-Connection diagram

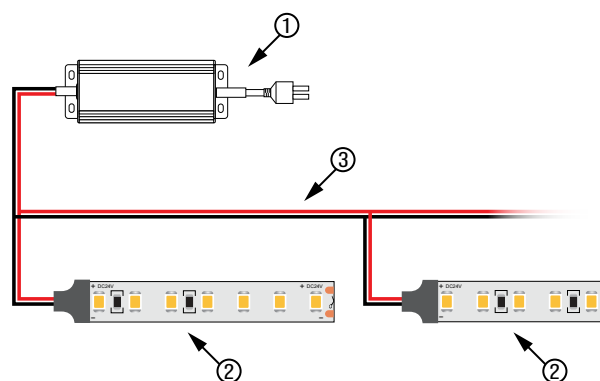

- ① Power supply (driver)
- ② LED strips
- ③ Wires

TECHNICAL SPECIFICATIONS

LED DIMENSIONS




SMD5630
(5.6mm x 3mm)

LED QTY



128DEL/m

INCREMENT



Cut every
61.91mm

VOLTAGE



24 volt

POWER



22W/m

PCB WIDTH



12mm

COLOR



Warm white:
2700-3200K, 2800-3100lm/m

Nature white:
4000-4500K, 3100-3200lm/m

Pure white:
6000-6500K, 3200-3300lm/m

PROTECTION TYPE



IP20



IP67

NOTICE

Before application, please make sure the power supply is in accordance to the strips.

DISCLAIMER

Due to our continued efforts to improve our documents and products, the specifications found on this document are subject to change without notice.