

FLX-28.8-1-12MM-3535-24-RGB

LED flexible strip



FEATURES


- Various angles 120 °
- With self-adhesive tape on the back
- Made up of high quality LEDs
- Work voltage DC24V
- Cut every 49.21mm

APPLICATIONS

- Car decoration
- Architectural decorative lighting
- Archway, ceiling, bridge edge lighting
- Auditorium walkway lighting
- Signage letters backlighting
- Channel letter lighting


MECHANICAL SPECIFICATIONS

-Dimensions version 120DEL/m

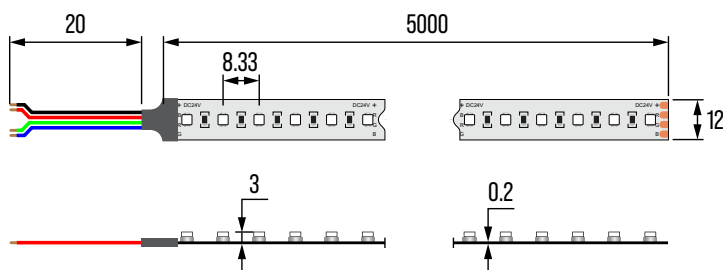


Unit: mm
Cut: 49.21mm
LED type: 3535 RGB

-Connection diagram

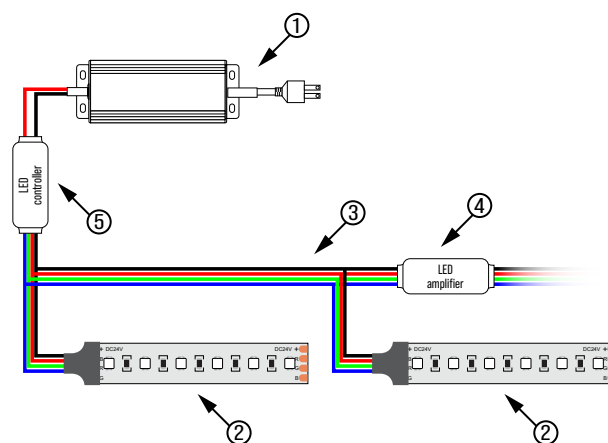

- ① Power supply (driver)
- ② LED strips
- ③ Wires
- ④ Amplifier
- ⑤ LED controller

TECHNICAL SPECIFICATIONS

LED DIMENSIONS	LED QTY	INCREMENT	VOLTAGE
 SMD3535 (3.5mm x 3.5mm)	 120DEL/m	 Cut every 49.21mm	 24 volt
POWER	PCB WIDTH	COLOR	PROTECTION TYPE
 28.8W/m	 12mm	RGB (red, green, blue) R: 620-630nm / 300-320lm/m G: 520-525nm / 745-780lm/m B: 460-470nm / 200-220lm/m	 IP20

NOTICE

Before application, please make sure the power supply is in accordance to the strips.

DISCLAIMER

Due to our continued efforts to improve our documents and products, the specifications found on this document are subject to change without notice.