


## SERIES MULTI

### Surface mount aluminum profile

"With its narrow "U" shape profile, its slim trim and its multiple color and finish options, this series combines style, great discretion and versatility. It offers several power, lenses and assembly options, allowing you to let your creativity run free. Fostering better heat dissipation, this series will blend with your decor and offer you its full potential for many years to come."



Description	mm	Inch
B - Width interior	12.20	0.4803
C - Width exterior	17.10	0.6732
D - Height	8.50	0.3346



#### FEATURES


- Surface mount
- Very discreet
- Can be cut to your needs
- Allows continuous joint mounting
- Direct or indirect lighting
- Wide choice of lens
- Wide choice of colors and finishes
- Clear Anodized Aluminum 6063T5

#### APPLICATION

Regular (all purpose)

#### MOUNTING

Surface mount



#### PROJECTION

Direct



Indirect



## POWER

Type	Lumen Meter	Feet	Watt Meter	Feet
Unique white	420	128	4.8	1.5
Unique white	500	152	4.8	1.5
Unique white	840	256	9.6	2.9
Unique white	1000	305	9.6	2.9
Unique white	700	213	12.0	3.7
Unique white	1100	335	12.0	3.7
Unique white	1400	427	14.0	4.3
Unique white	1200	366	14.4	4.4
Variable white	750	229	9.6	2.9
RGB			8.5	2.6
RGB			14.4	4.4

## COLOR TEMPERATURE

Kelvin	Type
2200K	
2400K	
2700K	
3000K	 Variable white 2500K - 6000K
3500K	
4000K	
5000K	
5200K	
6000K	
6500K	


## GRADATION

Type
Not dimmable
Dimmable Triac
Dimmable 0-10 Volt

## DIFFUSER

Type	Light diffuse	Angle
Opalin	78 %	120 °
Frost	85 %	120 °
Focus	93 %	60 °
Clear	93 %	120 °

## SHAPE

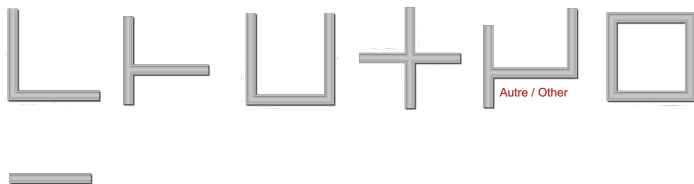

## LUMINAIRE COLOR





# Sale sheet

31-08-2021 09:49:14

---

## DISCLAIMER

Due to our continued efforts to improve our documents and products, the specifications found on this document are subject to change without notice.