



## IES INDOOR REPORT

PHOTOMETRIC FILENAME : FLX-9.6-8MM-3528-24-IP20-27K LL-0740 ALU-DOP\_IESNA95.IES

### DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-1995  
[TEST] 01  
[TESTLAB] LED-123 LAB  
[TESTDATE] 12-15-2020  
[ISSUEDATE] XX-XXX-1995  
[NEARFIELD]  
[LAMPPOSITION] 0,0  
[OTHER] LED123  
[MANUFAC] LED123  
[LUMCAT] FLX-9.6-8MM-3528-24-IP20-27K  
[LUMINAIRE] LL-0740 ALU LL-0740 DOP  
[LAMPCAT] 1  
[LAMP] 3528 120LED CRI90 PCB 8MM  
[BALLAST] DC24V

### CHARACTERISTICS

Lumens Per Lamp	300.3 (1 lamp)
Total Lamp Lumens	300.3
Luminaire Lumens	654
Total Luminaire Efficiency	218 %
Luminaire Efficacy Rating (LER)	69
Total Luminaire Watts	9.5
Ballast Factor	1.00
CIE Type	Semi-Direct
Spacing Criterion (0-180)	1.38
Spacing Criterion (90-270)	2.16
Spacing Criterion (Diagonal)	1.42
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	1.00 m
Luminous Width (90-270)	0.02 m
Luminous Height	0.00 m



### LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	8233	14288	16999
55	8053	16962	20840
65	7553	21287	26922
75	6600	28932	36879
85	7231	70614	101843

# IES INDOOR REPORT

PHOTOMETRIC FILENAME : FLX-9.6-8MM-3528-24-IP20-27K LL-0740 ALU-DOP\_IESNA95.IES

## CANDELA TABULATION

	<u>0</u>	<u>30</u>	<u>60</u>	<u>90</u>	<u>120</u>	<u>150</u>	<u>180</u>	<u>210</u>	<u>240</u>	<u>270</u>
0	151.555	151.555	151.555	151.555	151.555	151.555	151.555	151.555	151.555	151.555
5	155.780	160.900	163.390	166.080	162.500	159.300	153.410	146.750	138.300	137.790
10	155.330	170.750	177.790	180.930	176.320	167.490	149.950	137.790	130.620	130.620
15	153.730	175.940	188.290	192.900	185.790	173.440	145.090	130.500	117.820	114.690
20	150.720	178.690	198.850	206.020	194.880	175.940	139.010	123.010	90.880	73.600
25	147.520	181.700	208.830	218.750	205.180	175.810	131.840	110.780	44.100	35.460
30	141.630	183.550	216.580	227.070	213.250	176.320	123.330	89.660	19.260	11.650
35	134.780	184.580	220.740	232.320	217.470	175.550	113.860	54.720	7.740	7.230
40	125.570	184.510	221.630	236.290	218.620	172.160	103.300	31.550	5.250	5.060
45	116.480	180.480	223.810	240.510	218.750	169.730	91.140	16.320	3.710	3.900
50	104.830	174.720	225.220	241.660	218.820	163.650	79.680	8.700	3.070	3.390
55	92.420	166.980	222.340	239.170	216.960	155.970	65.020	6.140	2.750	3.070
60	77.820	159.170	216.960	233.860	210.620	144.900	50.500	4.800	2.560	2.880
65	63.870	149.950	210.050	227.650	201.980	134.780	36.800	3.970	2.370	2.750
70	48.770	137.280	197.250	214.980	191.680	121.220	23.300	3.260	2.300	2.690
75	34.180	123.010	176.640	190.980	176.130	105.540	12.290	2.690	2.180	2.560
80	21.950	108.290	161.020	184.830	145.730	90.370	5.180	2.370	2.180	2.620
85	12.610	94.980	151.300	177.600	138.880	75.390	1.660	2.180	2.240	2.690
90	6.660	84.290	150.660	164.800	139.140	63.680	1.410	2.110	2.240	2.690
95	2.430	46.340	111.550	149.890	84.800	32.450	1.340	2.110	2.300	2.750
100	1.860	22.270	92.220	121.410	77.120	11.520	1.150	2.180	2.500	2.880
105	1.920	4.290	39.230	60.350	26.180	2.500	1.280	2.300	2.620	3.010
110	1.860	1.790	6.980	8.190	5.820	0.770	1.340	2.300	2.820	3.140
115	1.660	0.900	4.030	3.780	3.390	0.830	1.470	2.430	2.940	3.260
120	1.660	0.830	2.300	1.980	1.860	0.900	1.540	2.500	2.940	3.330
125	1.980	0.900	1.410	0.830	1.340	1.020	1.660	2.560	2.940	3.330
130	2.110	1.090	1.340	0.640	1.340	1.090	1.730	2.620	2.940	3.330
135	2.180	1.280	1.340	0.770	1.340	1.220	1.790	2.620	2.940	3.330
140	2.240	1.340	1.410	0.900	1.410	1.340	1.920	2.690	2.940	3.330
145	2.300	1.470	1.540	1.020	1.540	1.470	1.980	2.690	2.940	3.260
150	2.370	1.600	1.600	1.220	1.660	1.600	2.050	2.690	2.880	3.200
155	2.370	1.730	1.730	1.410	1.790	1.730	2.180	2.690	2.880	3.140
160	2.430	1.790	1.860	1.540	1.860	1.860	2.240	2.690	2.750	3.010
165	2.500	1.920	1.980	1.730	1.980	1.980	2.300	2.620	2.690	2.940
170	2.500	2.110	2.110	1.860	2.180	2.110	2.370	2.560	2.560	2.750
175	2.500	2.240	2.300	2.110	2.300	2.240	2.370	2.430	2.430	2.560
180	2.404	2.404	2.404	2.404	2.404	2.404	2.404	2.404	2.404	2.404

## Vert. Angles Horizontal Angles

	<u>300</u>	<u>330</u>	<u>360</u>
0	151.555	151.555	151.555
5	138.370	146.430	155.780
10	130.300	137.790	155.330
15	118.590	129.730	153.730
20	98.560	123.330	150.720
25	54.720	114.300	147.520
30	27.330	100.610	141.630
35	9.790	78.780	134.780
40	6.020	49.340	125.570
45	4.220	28.220	116.480
50	3.260	16.130	104.830
55	2.880	9.280	92.420
60	2.620	6.270	77.820
65	2.430	4.670	63.870
70	2.240	3.780	48.770
75	2.180	2.940	34.180
80	2.110	2.430	21.950

**IES INDOOR REPORT****PHOTOMETRIC FILENAME : FLX-9.6-8MM-3528-24-IP20-27K LL-0740 ALU-DOP\_IESNA95.IES****CANDELA TABULATION - (Cont.)**

<b>85</b>	2.180	2.240	12.610
<b>90</b>	2.240	2.180	6.660
<b>95</b>	2.300	2.240	2.430
<b>100</b>	2.430	2.430	1.860
<b>105</b>	2.620	2.370	1.920
<b>110</b>	2.750	2.370	1.860
<b>115</b>	2.880	2.430	1.660
<b>120</b>	2.940	2.560	1.660
<b>125</b>	2.940	2.620	1.980
<b>130</b>	3.010	2.620	2.110
<b>135</b>	3.010	2.690	2.180
<b>140</b>	3.010	2.750	2.240
<b>145</b>	3.010	2.750	2.300
<b>150</b>	2.940	2.750	2.370
<b>155</b>	2.880	2.690	2.370
<b>160</b>	2.820	2.690	2.430
<b>165</b>	2.690	2.620	2.500
<b>170</b>	2.560	2.560	2.500
<b>175</b>	2.430	2.500	2.500
<b>180</b>	2.404	2.404	2.404

**IES INDOOR REPORT****PHOTOMETRIC FILENAME : FLX-9.6-8MM-3528-24-IP20-27K LL-0740 ALU-DOP\_IESNA95.IES****ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	57.33	19.10	8.80
0-30	120.21	40.00	18.40
0-40	195.51	65.10	29.90
0-60	367.47	122.40	56.20
0-80	526.66	175.40	80.60
0-90	587.55	195.70	89.90
10-90	572.96	190.80	87.60
20-40	138.19	46.00	21.10
20-50	221.95	73.90	34.00
40-70	257.58	85.80	39.40
60-80	159.20	53.00	24.40
70-80	73.57	24.50	11.30
80-90	60.89	20.30	9.30
90-110	56.93	19.00	8.70
90-120	59.53	19.80	9.10
90-130	61.33	20.40	9.40
90-150	64.27	21.40	9.80
90-180	66.20	22.00	10.10
110-180	9.27	3.10	1.40
0-180	653.75	217.70	100.00

Total Luminaire Efficiency = 217.70%

**ZONAL LUMEN SUMMARY**

Zone	Lumens
0-10	14.59
10-20	42.74
20-30	62.88
30-40	75.31
40-50	83.77
50-60	88.18
60-70	85.63
70-80	73.57
80-90	60.89
90-100	41.92
100-110	15.01
110-120	2.60
120-130	1.80
130-140	1.58
140-150	1.36
150-160	1.05
160-170	0.66
170-180	0.23

# IES INDOOR REPORT

PHOTOMETRIC FILENAME : FLX-9.6-8MM-3528-24-IP20-27K LL-0740 ALU-DOP\_IESNA95.IES

## COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC RW	80				70				50			30			10			0
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	254	254	254	254	245	245	245	245	230	230	230	215	215	215	202	202	202	196
1	223	209	196	185	214	202	190	180	188	179	170	175	168	161	164	158	152	146
2	200	178	159	144	191	171	155	141	160	146	134	149	138	128	139	130	121	115
3	180	154	133	116	172	148	129	114	138	122	109	129	116	104	121	109	100	93
4	164	135	113	97	157	130	110	95	122	104	91	114	99	87	106	94	84	78
5	150	119	98	82	144	115	95	80	108	91	77	101	86	75	95	82	72	66
6	138	107	86	71	132	104	84	70	97	80	67	91	76	65	86	73	62	57
7	128	97	76	62	123	94	74	61	88	71	59	83	68	57	78	65	55	50
8	119	88	68	55	114	85	67	54	80	64	52	76	61	51	72	59	49	44
9	111	80	62	49	107	78	60	48	74	58	47	70	56	45	66	53	44	40
10	104	74	56	44	100	72	55	44	68	53	42	65	51	41	61	49	40	36

# IES INDOOR REPORT

PHOTOMETRIC FILENAME : FLX-9.6-8MM-3528-24-IP20-27K LL-0740 ALU-DOP\_IESNA95.IES

## UGR TABLE - CORRECTED

### Reflectances

Ceiling Cavity	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor Cavity	20	20	20	20	20	20	20	20	20	20

### Room Size UGR Viewed Crosswise

X=2H	Y=2H	19.0	20.5	19.5	21.0	21.6	24.8	26.3	25.3	26.8	27.4
	3H	21.0	22.4	21.5	23.0	23.5	28.1	29.5	28.6	30.0	30.6
	4H	21.8	23.1	22.3	23.7	24.3	29.6	31.0	30.2	31.5	32.1
	6H	22.4	23.7	23.0	24.2	24.9	31.4	32.7	31.9	33.2	33.8
	8H	22.7	23.9	23.2	24.5	25.1	32.4	33.6	32.9	34.2	34.8
	12H	22.9	24.1	23.4	24.6	25.3	33.5	34.7	34.1	35.3	35.9

### UGR Viewed Endwise


4H	2H	20.8	22.2	21.3	22.7	23.3	25.4	26.8	25.9	27.3	27.9
	3H	23.3	24.4	23.8	25.0	25.6	29.0	30.2	29.6	30.8	31.4
	4H	24.3	25.4	24.9	26.0	26.6	30.8	31.9	31.4	32.5	33.1
	6H	25.2	26.1	25.7	26.7	27.4	32.8	33.7	33.4	34.4	35.0
	8H	25.5	26.4	26.1	27.0	27.7	33.9	34.8	34.5	35.4	36.1
	12H	25.8	26.7	26.4	27.3	28.0	35.2	36.0	35.8	36.7	37.4
8H	4H	25.8	26.7	26.4	27.3	28.0	31.2	32.2	31.8	32.8	33.5
	6H	27.1	27.9	27.8	28.6	29.3	33.5	34.3	34.1	34.9	35.6
	8H	27.8	28.5	28.4	29.1	29.8	34.8	35.5	35.4	36.2	36.9
	12H	28.3	29.0	28.9	29.6	30.4	36.4	37.0	37.0	37.7	38.4
12H	4H	26.3	27.1	26.9	27.7	28.4	31.3	32.2	31.9	32.8	33.5
	6H	27.8	28.6	28.5	29.2	29.9	33.6	34.4	34.3	35.0	35.7
	8H	28.7	29.3	29.3	30.0	30.7	35.1	35.7	35.7	36.4	37.1

Maximum UGR = 38.4

# IES INDOOR REPORT

PHOTOMETRIC FILENAME : FLX-9.6-8MM-3528-24-IP20-27K LL-0740 ALU-DOP\_IESNA95.IES

## POLAR GRAPH

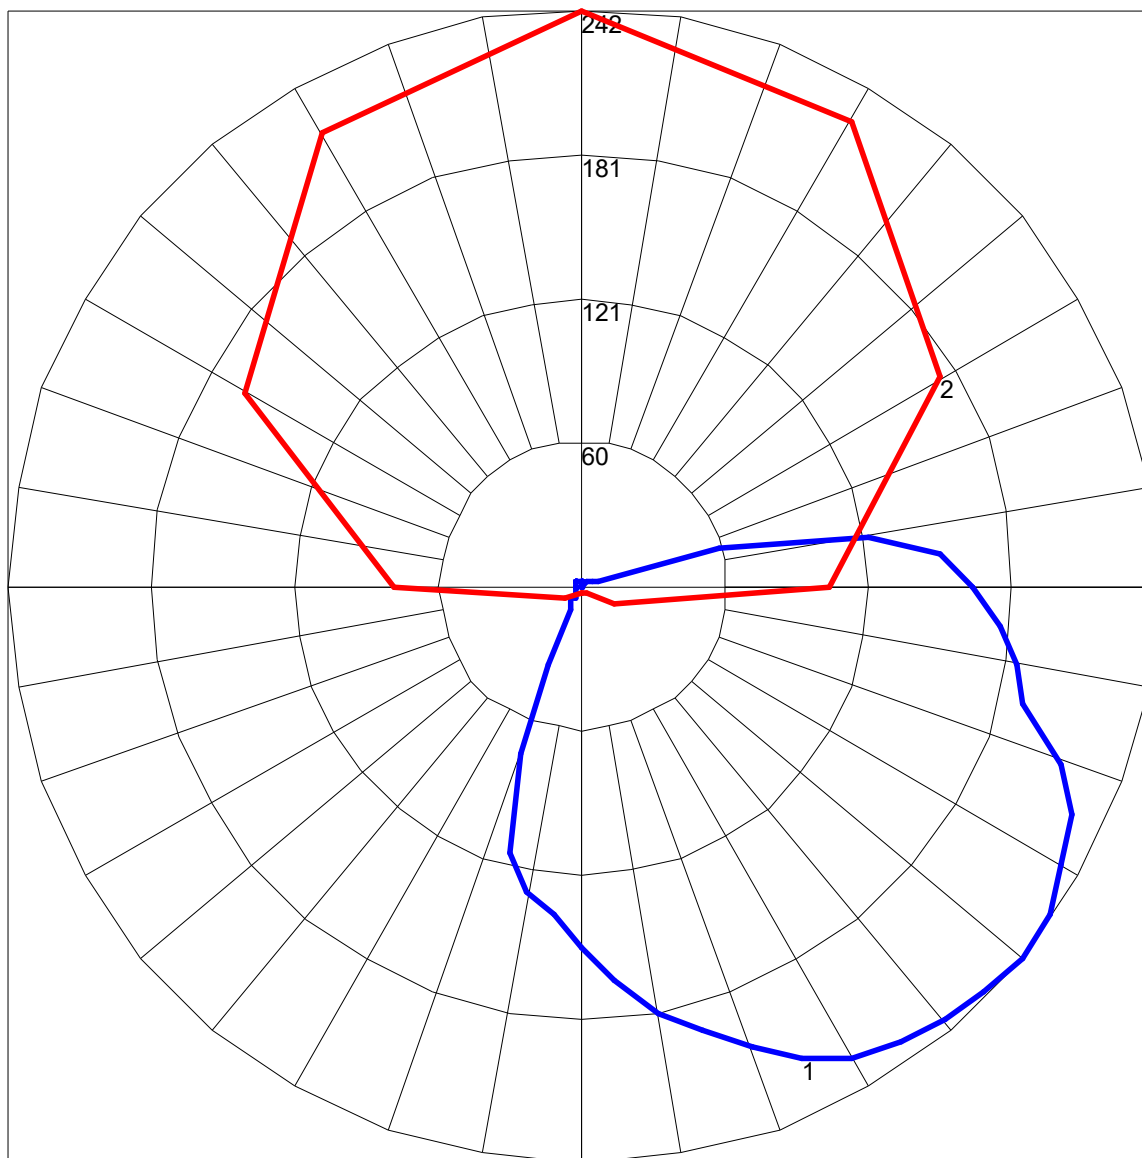

Maximum Candela = 241.66 Located At Horizontal Angle = 90, Vertical Angle = 50

# 1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)

# 2 - Horizontal Cone Through Vertical Angle (50) (Through Max. Cd.)