



## IES INDOOR REPORT

PHOTOMETRIC FILENAME : FLX-9.6-8MM-3528-24-IP20-27K LL-0746 ALU-DOP\_IESNA95.IES

### DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-1995  
 [TEST] 01  
 [TESTLAB] LED-123 LAB  
 [TESTDATE] 12-15-2020  
 [ISSUEDATE] XX-XXX-1995  
 [NEARFIELD]  
 [LAMPPOSITION] 0,0  
 [OTHER] LED123  
 [MANUFAC] LED123  
 [LUMCAT] FLX-9.6-8MM-3528-24-IP20-27K  
 [LUMINAIRE] LL-0746 ALU LL-0746 DOP  
 [LAMPCAT] 1  
 [LAMP] 3528 120LED CRI90 PCB 8MM  
 [BALLAST] DC24V

### CHARACTERISTICS

Lumens Per Lamp	298.1 (1 lamp)
Total Lamp Lumens	298.1
Luminaire Lumens	579
Total Luminaire Efficiency	194 %
Luminaire Efficacy Rating (LER)	61
Total Luminaire Watts	9.5
Ballast Factor	1.00
CIE Type	Semi-Direct
Spacing Criterion (0-180)	1.30
Spacing Criterion (90-270)	2.16
Spacing Criterion (Diagonal)	1.46
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	1.00 m
Luminous Width (90-270)	0.02 m
Luminous Height	0.00 m



### LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	8281	15769	19868
55	7659	18322	24411
65	7458	22590	31798
75	7745	30633	43963
85	12088	73328	115828

# IES INDOOR REPORT

PHOTOMETRIC FILENAME : FLX-9.6-8MM-3528-24-IP20-27K LL-0746 ALU-DOP\_IESNA95.IES

## CANDELA TABULATION

	<u>0</u>	<u>30</u>	<u>60</u>	<u>90</u>	<u>120</u>	<u>150</u>	<u>180</u>	<u>210</u>	<u>240</u>	<u>270</u>
0	133.729	133.729	133.729	133.729	133.729	133.729	133.729	133.729	133.729	133.729
5	137.470	142.020	143.870	145.980	142.980	140.420	134.340	125.890	118.400	118.080
10	136.130	147.710	154.940	158.400	153.090	144.830	130.370	116.220	104.900	103.680
15	132.800	151.420	165.120	170.180	162.240	147.710	124.740	105.410	90.880	88.900
20	128.450	153.340	173.890	180.800	170.050	148.860	117.630	93.890	79.680	74.500
25	123.580	154.180	180.930	189.820	176.130	148.220	109.630	82.430	64.000	62.020
30	116.480	154.110	186.370	197.630	180.800	146.370	100.800	70.980	52.800	49.150
35	107.970	152.060	189.950	203.840	183.680	143.230	90.370	59.970	41.220	38.660
40	98.300	147.970	192.060	208.190	184.960	137.790	79.620	50.500	32.380	30.210
45	87.870	142.140	192.510	210.820	184.450	130.560	68.160	39.740	24.960	23.300
50	77.380	135.040	191.300	211.460	182.400	122.110	57.340	30.980	19.140	17.980
55	65.920	126.980	188.420	210.110	178.750	112.900	47.300	23.680	14.660	13.950
60	57.150	117.890	183.940	206.780	173.700	102.850	37.180	17.470	11.070	10.820
65	47.300	108.350	178.180	201.660	167.230	93.380	28.220	12.480	8.450	8.510
70	38.460	98.300	167.740	190.910	159.230	83.390	20.290	8.770	6.460	6.850
75	30.080	88.060	149.890	170.750	144.830	72.770	13.120	6.140	5.060	5.440
80	22.590	78.720	134.530	162.110	119.940	62.850	7.170	4.420	4.220	4.740
85	15.810	68.740	123.070	151.490	110.910	53.120	2.750	3.520	3.780	4.290
90	9.980	59.140	117.440	136.130	105.470	44.100	1.600	3.010	3.390	3.970
95	3.390	38.270	86.140	119.620	67.520	27.460	1.220	2.560	3.070	3.650
100	1.860	30.020	81.090	104.580	68.990	18.240	0.960	2.300	2.750	3.330
105	1.730	18.820	63.620	83.140	54.210	8.770	1.090	2.110	2.560	3.070
110	1.660	7.230	40.640	50.560	32.320	1.220	1.150	2.050	2.430	2.940
115	1.470	1.020	19.780	24.960	14.660	0.830	1.220	2.050	2.430	2.880
120	1.540	0.830	7.620	10.180	4.990	0.900	1.280	2.110	2.500	2.940
125	1.790	0.900	2.180	3.260	1.660	0.960	1.410	2.180	2.500	2.940
130	1.920	1.090	1.600	0.830	1.470	1.020	1.470	2.240	2.560	2.940
135	1.980	1.220	1.540	0.900	1.470	1.150	1.600	2.240	2.560	2.940
140	2.050	1.340	1.540	0.960	1.540	1.280	1.660	2.300	2.560	2.880
145	2.110	1.410	1.600	1.090	1.540	1.340	1.730	2.300	2.560	2.880
150	2.180	1.540	1.660	1.220	1.660	1.470	1.790	2.300	2.500	2.820
155	2.180	1.600	1.790	1.340	1.730	1.600	1.860	2.300	2.430	2.750
160	2.240	1.730	1.860	1.470	1.790	1.730	1.980	2.300	2.370	2.620
165	2.240	1.860	1.920	1.600	1.920	1.790	2.110	2.300	2.300	2.560
170	2.300	1.920	2.050	1.790	1.980	1.920	2.180	2.300	2.240	2.430
175	2.300	2.050	2.180	1.920	2.110	1.980	2.240	2.240	2.110	2.300
180	2.170	2.170	2.170	2.170	2.170	2.170	2.170	2.170	2.170	2.170

## Vert. Horizontal Angles

	<u>300</u>	<u>330</u>	<u>360</u>
0	133.729	133.729	133.729
5	118.910	126.780	137.470
10	105.920	117.500	136.130
15	91.970	107.520	132.800
20	79.550	97.340	128.450
25	66.180	86.980	123.580
30	60.990	75.650	116.480
35	43.970	64.580	107.970
40	34.560	53.950	98.300
45	26.820	44.990	87.870
50	20.480	35.390	77.380
55	15.620	26.820	65.920
60	11.780	19.710	57.150
65	8.830	13.890	47.300
70	6.340	9.600	38.460
75	4.670	6.460	30.080
80	3.330	4.480	22.590

**IES INDOOR REPORT****PHOTOMETRIC FILENAME : FLX-9.6-8MM-3528-24-IP20-27K LL-0746 ALU-DOP\_IESNA95.IES****CANDELA TABULATION - (Cont.)**

<b>85</b>	3.460	3.460	15.810
<b>90</b>	2.940	3.010	9.980
<b>95</b>	2.750	2.430	3.390
<b>100</b>	2.750	2.300	1.860
<b>105</b>	2.560	2.050	1.730
<b>110</b>	2.500	2.050	1.660
<b>115</b>	2.430	2.050	1.470
<b>120</b>	2.500	2.110	1.540
<b>125</b>	2.560	2.180	1.790
<b>130</b>	2.560	2.240	1.920
<b>135</b>	2.560	2.300	1.980
<b>140</b>	2.560	2.300	2.050
<b>145</b>	2.560	2.300	2.110
<b>150</b>	2.560	2.300	2.180
<b>155</b>	2.500	2.300	2.180
<b>160</b>	2.430	2.300	2.240
<b>165</b>	2.370	2.300	2.240
<b>170</b>	2.240	2.240	2.300
<b>175</b>	2.180	2.180	2.300
<b>180</b>	2.170	2.170	2.170

**IES INDOOR REPORT****PHOTOMETRIC FILENAME : FLX-9.6-8MM-3528-24-IP20-27K LL-0746 ALU-DOP\_IESNA95.IES****ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	48.88	16.40	8.40
0-30	104.50	35.10	18.10
0-40	173.51	58.20	30.00
0-60	325.88	109.30	56.30
0-80	459.85	154.30	79.40
0-90	509.57	170.90	88.00
10-90	496.94	166.70	85.90
20-40	124.63	41.80	21.50
20-50	200.42	67.20	34.60
40-70	224.67	75.40	38.80
60-80	133.97	44.90	23.10
70-80	61.66	20.70	10.70
80-90	49.73	16.70	8.60
90-110	55.75	18.70	9.60
90-120	62.78	21.10	10.80
90-130	64.85	21.80	11.20
90-150	67.53	22.70	11.70
90-180	69.27	23.20	12.00
110-180	13.52	4.50	2.30
0-180	578.84	194.20	100.00

Total Luminaire Efficiency = 194.20%

**ZONAL LUMEN SUMMARY**

Zone	Lumens
0-10	12.63
10-20	36.24
20-30	55.62
30-40	69.01
40-50	75.79
50-60	76.58
60-70	72.31
70-80	61.66
80-90	49.73
90-100	34.69
100-110	21.06
110-120	7.03
120-130	2.07
130-140	1.45
140-150	1.23
150-160	0.94
160-170	0.60
170-180	0.20

# IES INDOOR REPORT

PHOTOMETRIC FILENAME : FLX-9.6-8MM-3528-24-IP20-27K LL-0746 ALU-DOP\_IESNA95.IES

## COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	226	226	226	226	218	218	218	218	203	203	203	189	189	189	177	177	177	171
1	199	187	176	166	191	180	170	161	167	159	152	155	149	143	144	139	134	128
2	178	159	143	130	170	153	139	126	142	130	120	132	122	114	123	115	108	102
3	161	138	120	105	154	133	116	103	123	109	98	115	103	93	107	97	89	83
4	147	121	102	87	140	116	99	85	108	94	82	101	88	78	94	83	75	69
5	134	107	88	74	128	103	86	73	97	81	70	90	77	67	84	73	64	59
6	124	96	77	64	118	93	75	63	87	72	60	81	68	58	76	64	56	51
7	114	87	69	56	109	84	67	55	79	64	53	74	61	51	69	58	49	44
8	106	79	61	49	102	76	60	49	72	57	47	67	55	45	63	52	44	39
9	99	72	55	44	95	70	54	43	66	52	42	62	50	41	58	47	39	35
10	93	66	50	40	89	64	49	39	61	47	38	57	45	37	54	43	35	32

# IES INDOOR REPORT

PHOTOMETRIC FILENAME : FLX-9.6-8MM-3528-24-IP20-27K LL-0746 ALU-DOP\_IESNA95.IES

## UGR TABLE - CORRECTED

### Reflectances

Ceiling Cavity	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor Cavity	20	20	20	20	20	20	20	20	20	20

### Room Size UGR Viewed Crosswise

X=2H	Y=2H	18.5	20.1	19.1	20.6	21.2	25.1	26.6	25.6	27.1	27.7
	3H	20.5	21.9	21.1	22.5	23.1	28.5	29.9	29.0	30.4	31.0
	4H	21.4	22.7	21.9	23.3	23.9	30.1	31.4	30.6	32.0	32.6
	6H	22.2	23.4	22.8	24.0	24.7	31.8	33.1	32.4	33.6	34.3
	8H	22.6	23.8	23.1	24.4	25.0	32.8	34.0	33.4	34.6	35.3
	12H	22.9	24.1	23.5	24.7	25.4	33.9	35.1	34.5	35.7	36.4

### UGR Viewed Endwise


4H	2H	20.5	21.8	21.1	22.4	23.0	25.6	26.9	26.2	27.5	28.1
	3H	22.8	23.9	23.3	24.5	25.2	29.4	30.5	29.9	31.1	31.8
	4H	23.8	24.9	24.4	25.5	26.2	31.2	32.2	31.8	32.8	33.5
	6H	24.8	25.7	25.4	26.3	27.0	33.1	34.1	33.8	34.7	35.4
	8H	25.2	26.1	25.8	26.7	27.4	34.3	35.1	34.9	35.8	36.5
	12H	25.6	26.4	26.3	27.1	27.8	35.5	36.4	36.2	37.0	37.7
8H	4H	25.4	26.3	26.1	27.0	27.7	31.5	32.4	32.1	33.0	33.8
	6H	26.8	27.5	27.4	28.2	28.9	33.8	34.5	34.4	35.2	35.9
	8H	27.4	28.1	28.0	28.8	29.5	35.1	35.8	35.7	36.5	37.2
	12H	28.0	28.6	28.7	29.3	30.1	36.6	37.3	37.3	37.9	38.7
12H	4H	26.0	26.8	26.6	27.4	28.2	31.6	32.4	32.2	33.0	33.8
	6H	27.5	28.2	28.2	28.9	29.6	33.9	34.6	34.6	35.2	36.0
	8H	28.3	29.0	29.0	29.6	30.4	35.3	35.9	36.0	36.6	37.4

Maximum UGR = 38.7

# IES INDOOR REPORT

PHOTOMETRIC FILENAME : FLX-9.6-8MM-3528-24-IP20-27K LL-0746 ALU-DOP\_IESNA95.IES

## POLAR GRAPH

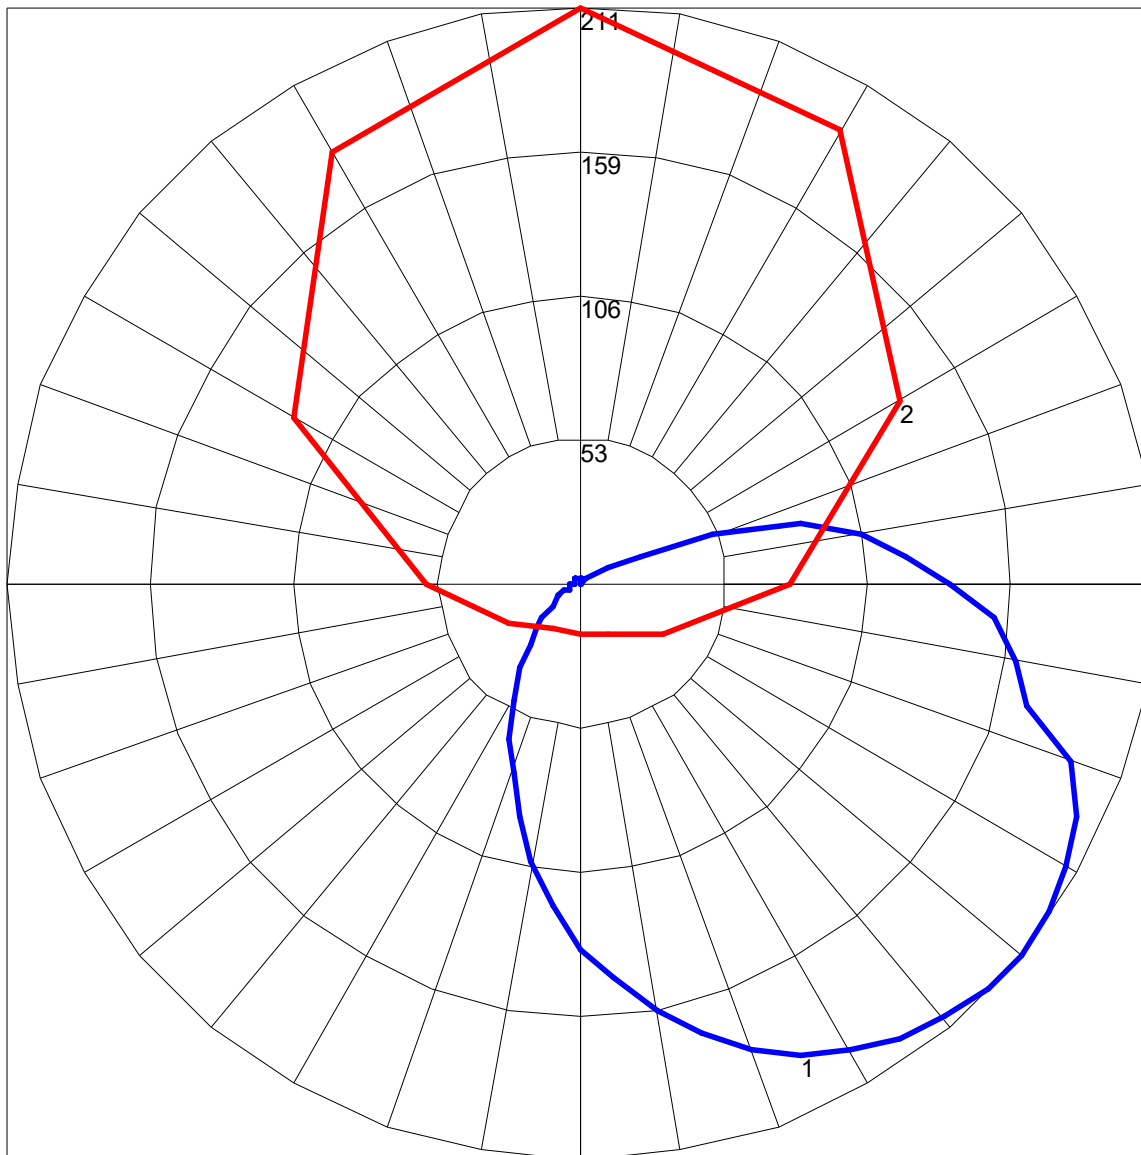

Maximum Candela = 211.46 Located At Horizontal Angle = 90, Vertical Angle = 50

# 1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)

# 2 - Horizontal Cone Through Vertical Angle (50) (Through Max. Cd.)