


SERIES SIGILLUM

Aluminum profile for corner mounting

The bevel cut of this series (O'Gee style) allows it to be easily installed in a corner of the wall while its interior design is designed to offer a projection angle of 45 degrees. This series will give a unique style and lighting to your environment and will turn the heads of your guests. It offers several options of colors, finishes, wattage, lenses and assembly allowing you to unleash your creativity. Promoting better heat dissipation, this series will offer you its full potential for many years to come.



Description	mm	Inch
B - Width interior	20.20	0.7953
C - Width exterior	30.00	1.1811
D - Height	30.00	1.1811




FEATURES

- Stylish
- Modern
- O'Gee style for corner mounting
- 45 degrees projections
- Can be cut according to your needs
- Allows continuous joint mounting
- Direct or indirect lighting
- Wide choice of lens
- Wide choice of colors and finishes
- Clear Anodized Aluminum 6063T5

MOUNTING

Surface mount



PROJECTION

Direct



Indirect



APPLICATION

- Inside corner edge
- Regular (all purpose)

POWER

Type	Lumen Meter	Feet	Watt Meter	Feet
Unique white	420	128	4.8	1.5
Unique white	500	152	4.8	1.5
Unique white	840	256	9.6	2.9
Unique white	1000	305	9.6	2.9
Unique white	700	213	12.0	3.7
Unique white	1100	335	12.0	3.7
Unique white	1400	427	14.0	4.3
Unique white	1200	366	14.4	4.4
Unique white	1700	518	18.0	5.5
Unique white	1700	518	19.2	5.9
Unique white	1800	549	19.2	5.9
Unique white	3400	1036	22.0	6.7
Unique white	4000	1219	22.0	6.7
Variable white	750	229	9.6	2.9
Variable white	1500	457	19.2	5.9
Variable white	1680	512	19.2	5.9
Variable white	1500	457	23.0	7.0
Variable white	2000	610	23.0	7.0
Dim to warm	1800	549	23.0	7.0
RGB			8.5	2.6
RGB			14.4	4.4
RGB			17.0	5.2
RGB			20.0	6.1
RGB			20.0	6.1
RGBA			19.2	5.9
RGBA			19.2	5.9
RGBA			23.0	7.0
RGBW			19.2	5.9
RGBW			23.0	7.0

COLOR TEMPERATURE

Kelvin	Type
2200K	
2400K	
2700K	
3000K	
3500K	
4000K	
5000K	
5200K	
6000K	
6500K	

Dim to warm
1800K - 3000K

Variable white
2500K - 6000K
2700K - 6000K


GRADATION

Type
Not dimmable
Dimmable Triac
Dimmable 0-10 Volt

DIFFUSER

Type	Light diffuse	Angle
Opalin	78 %	120 °
Frost	86 %	120 °
Clear	95 %	120 °

SHAPE

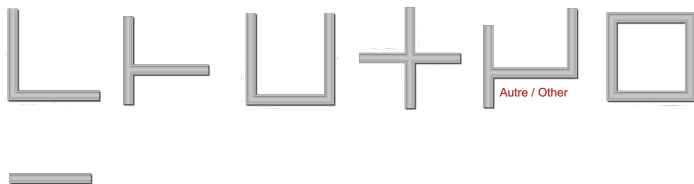

LUMINAIRE COLOR





Sale sheet

31-08-2021 09:53:27

DISCLAIMER

Due to our continued efforts to improve our documents and products, the specifications found on this document are subject to change without notice.